



KLEMM-PROFILE / GLAZING PROFILES

**KLEMM-PROFIL
GLAZING PROFILE**

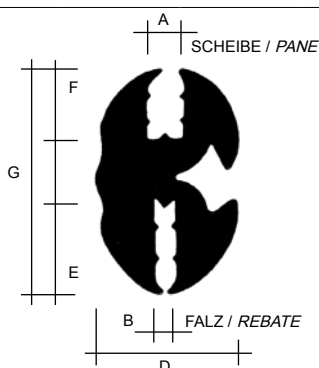

**FÜLLER-PROFIL
FILLER PROFILE**



KLEMM-PROFIL / GLAZING PROFILE

EPDM-460 schwarz / black				60 ±5° shA					-40 / +100° C	
A mm	B mm	D mm	E mm	F mm	G mm	Biegeradius bending radii mm	Gewicht weight g/m	VE packing unit m	Art.-Nr.	
3	1	10,2	3	3	10	20	90	50	520-0460.000000	
3	1	11,6	4,5	6	14,5	35	145	20	520-0460.100100	
3	2	10,2	3	3	10	20	95	20	520-0460.640000	
4	1,5	13,6	5	6	15	35	165	20	520-0460.400100	
4	1,5	16	7	7	21	80	270	20	520-0460.500200	
4	2	18	11	8,7	27	100	405	15	520-0460.700200	
4	3	12,6	5	6	18	35	150	20	520-0460.730100	
4	3	16	7	7	21	80	230	20	520-0460.800200	
4	3	19	12,5	9,5	22,5	100	465	15	520-0460.900200	
4,5	5	16	7	7	21	80	300	20	520-0460.110200	
5	2	19	12,5	9,5	29,5	100	410	15	520-0460.210200	
5	3	18	7,5	8	23	90	345	15	520-0460.930200	
5	2	14,6	6	6	17	40	350	20	520-0460.940200	
5	3	19	12,5	9,5	29,5	100	460	20	520-0460.310200	
5	5	18,4	9	8	24	90	360	15	520-0460.410200	
5,5	2	19	11	8,7	27,2	100	400	15	520-0460.510200	
6	1,5	19	12,5	9,5	29,5	100	400	15	520-0460.610200	
6	2,5	19	8	8	23	90	350	20	520-0460.710200	
6	3	19	12,5	9,5	29,5	100	410	15	520-0460.810200	
6	4	19	12,5	9,5	29,5	100	390	15	520-0460.910200	
6	6	19	9,5	9	27	100	435	15	520-0460.140200	
6,5	3,5	18	7,5	8	23	90	345	20	520-0460.020200	
6	10	22,7	12,5	9,5	29,5	100	505	15	520-0460.240200	
8	4	25	12,5	10	31	100	620	15	520-0460.740200	
10	6	24	12,5	9,5	29,5	100	570	15	520-0460.540200	

MVQ-850 transluzent / silicone translucent				50 ±5° shA					-60 / +180° C	
A mm	B mm	D mm	E mm	F mm	G mm	Biegeradius bending radii mm	Gewicht weight g/m	VE packing unit m	Art.-Nr.	
4	2	12,6	5	6	15	35			520-0850.020100	

MVQ-870 transluzent / silicone translucent				70 ±5° shA					-60 / +180° C	
A mm	B mm	D mm	E mm	F mm	G mm	Biegeradius bending radii mm	Gewicht weight g/m	VE packing unit m	Art.-Nr.	
1,6	1,6	12,0	5	5	16	20		50	520-0870.032100	
4	1,5	16	7	7	21	80		50	520-0870.036100	
5	1,5	12,2	6	5	17	90		50	520-0870.040100	

FÜLLER-PROFIL / FILLER PROFILE

MVQ-870 transluzent / silicone translucent				70 ±5° shA					-60 / +180° C	
a mm	b mm	End-Nr. des obigen Klemmprofils end number from the above glazing profile			Gewicht weight g/m	VE packing unit m	Art.-Nr.			
7,0	6,0	...100			28	50	520-0870.000100			

EPDM-485 schwarz / black				85 ±5° shA					-40 / +100° C	
a mm	b mm	End-Nr. des obigen Klemmprofils end number from the above glazing profile			Gewicht weight g/m	VE packing unit m	Art.-Nr.			
5,5	4,5	...000			18	100	520-0485.000000			
7,0	6,0	...100			28	100	520-0485.000100			
9,5	7,5	...200			50	50	520-0485.000200			