



# MANNLOCH-PROFILE / MANWAY DOOR PROFILES FDA

→ Kapitel Dichtungen/Mannloch-Dichtringe / → *chapter gaskets/manhole gaskets*

<b>ROLLENLÄNGE</b>	25 m und Abschnitte
<b>ZULASSUNGEN</b>	FDA 21CFR 177.2600 konform
<b>ROLL LENGTH</b>	25 m and cut-off length
<b>APPROVALS</b>	FDA 21CFR 177.2600 compliant

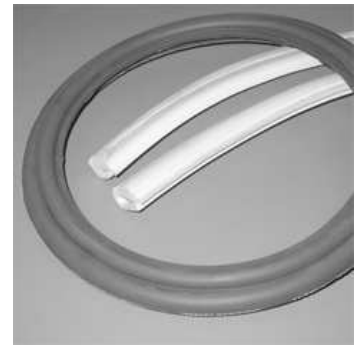

**Form A / LKD**  
druckbelasteter Behälter  
*pressurised tank*

Form A	NBR-266 weiß / white				-35 / +100° C
B 1 mm	B 2 mm	H mm	s mm	h mm	Art. Nr.
22	18	18	6	14	<b>532-0266.0010</b>
37	27	26	6	16	<b>532-0266.0015</b>

Form A	NR-155 weiß / white				-30 / +80° C
B 1 mm	B 2 mm	H mm	s mm	h mm	Art. Nr.
37	27	26	6	16	<b>532-0155.0015</b>


Form A	MVQ-860 transluzent / silicone translucent				-60 / +200° C
B 1 mm	B 2 mm	H mm	s mm	h mm	Art. Nr.
32	25	25	7	17	<b>532-0860.0010</b>
33	20	21,5	4	14	<b>532-0860.0015</b>

Form A	EPDM-466 weiß / white				-40 / +130° C
B 1 mm	B 2 mm	H mm	s mm	h mm	Art. Nr.
37	27	26	6	16	<b>532-0466.0015</b>


# MANNLOCH-PROFILE / MANWAY DOOR PROFILES FDA

→ Kapitel Dichtungen/Mannloch-Dichtringe / → *chapter gaskets/manhole gaskets*

<b>ROLLENLÄNGE</b>	25 m und Abschnitte
<b>ZULASSUNGEN</b>	FDA 21CFR 177.2600 konform
<b>ROLL LENGTH</b>	25 m and cut-off length
<b>APPROVALS</b>	FDA 21CFR 177.2600 compliant



**Form C / LKDC**  
druckloser Behälter  
*pressless tank*



**Form D / LKDC**  
druckloser Behälter  
*pressless tank*

<b>Form C</b>	<b>NBR-266 weiß / white</b>				-35 / +100° C
B 1 mm	B 2 mm	H mm	s mm	h mm	<b>Art. Nr.</b>
18	13	14	2		<b>532-0266.0020</b>

<b>Form C</b>	<b>MVQ-860 transluzent / silicone translucent</b>				-60 / +200° C
B 1 mm	B 2 mm	H mm	s mm	h mm	<b>Art. Nr.</b>
18	13	14	2		<b>532-0860.0020</b>

<b>Form C</b>	<b>EPDM-466 weiß / white</b>				-40 / +130° C
B 1 mm	B 2 mm	H mm	s mm	h mm	<b>Art. Nr.</b>
18	13	14	2		<b>532-0466.0020</b>



<b>Form C</b>	<b>CSM-765 schwarz / black</b>				-40 / +140° C
B 1 mm	B 2 mm	H mm	s mm	h mm	<b>Art. Nr.</b>
18	13	14	2		<b>532-0765.0020</b>

<b>Form D</b>	<b>MVQ-840 transluzent / silicone translucent</b>				-60 / +200° C
B 1 mm	B 2 mm	H mm	s mm	h mm	<b>Art. Nr.</b>
15	12	15	2		<b>532-0840.0025</b>

# MANNLOCH-PROFILE / MANWAY DOOR PROFILES FDA

→ Kapitel Dichtungen/Mannloch-Dichtringe / → *chapter gaskets/manhole gaskets*

<b>ROLLENLÄNGE</b>	25 m und Abschnitte
<b>ZULASSUNGEN</b>	FDA 21CFR 177.2600 konform
<b>ROLL LENGTH</b>	25 m and cut-off length
<b>APPROVALS</b>	FDA 21CFR 177.2600 compliant

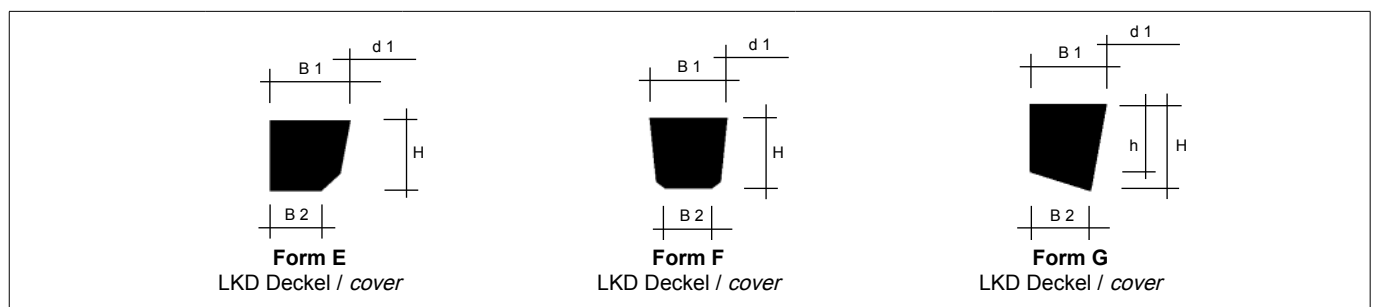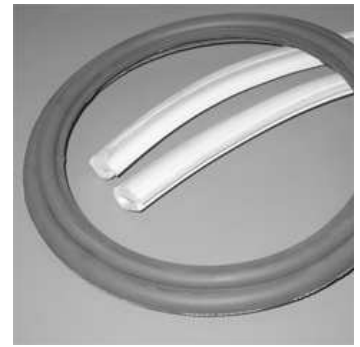

### Weichgummi / soft rubber

Form E	NBR-266 weiß / white				-35 / +100° C
B 1 mm	B 2 mm	H mm	s mm	h mm	Art. Nr.
16	10	15			532-0266.0030

Form E	EPDM-466 weiß / white				-40 / +130° C
B 1 mm	B 2 mm	H mm	s mm	h mm	Art. Nr.
16	10	15			532-0466.0030

Form F	NBR-266 weiß / white				-35 / +100° C
B 1 mm	B 2 mm	H mm	s mm	h mm	Art. Nr.
14	9	13			532-0266.0040

Form F	EPDM-466 weiß / white				-40 / +130° C
B 1 mm	B 2 mm	H mm	s mm	h mm	Art. Nr.
14	9	13			532-0466.0040

Form F	MVQ-860 transluzent / silicone translucent				-60 / +200° C
B 1 mm	B 2 mm	H mm	s mm	h mm	Art. Nr.
14	9	13			532-0860.0040

Form G	NBR-266 weiß / white				-35 / +100° C
B 1 mm	B 2 mm	H mm	s mm	h mm	Art. Nr.
21	18	24		19	532-0266.0050