




TANKDECKEL-PROFILE / TANK-COVER SEALING PROFILES

rechteckig / square

| | |
|--------------------|------------------------------|
| ROLLENLÄNGE | 25-50 m und Abschnitte |
| ZULASSUNGEN | FDA 21CFR 177.2600 konform |
| ROLL LENGTH | 25-50 m and cut-off length |
| APPROVALS | FDA 21CFR 177.2600 compliant |

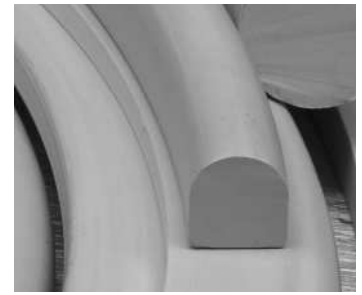

Form A



Form B

Weichgummi FDA / soft rubber FDA

| Form A | NBR-266 weiß / white | 60 ±5° shA | -35 / +100° C |
|---------|----------------------|-----------------------|-----------------|
| B mm | H mm | Radius / radius mm | Art.-Nr. |
| 6 | 6 | 3 | 508-0266.060006 |
| 6 | 9 | 3 | 508-0266.060009 |
| 8 | 8 | 4 | 508-0266.080008 |
| 8 | 12 | 4 | 508-0266.080012 |
| 10 | 10 | 5 | 508-0266.100010 |
| 10 | 15 | 5 | 508-0266.100015 |
| 12 | 12 | 6 | 508-0266.120012 |
| 12 | 18 | 6 | 508-0266.120018 |

Silikonkautschuk FDA / silicone rubber FDA

| Form A | MVQ-860 transluzent / silicone translucent | 60 ±5° shA | -60 / +200° C |
|---------|--|-----------------------|-----------------|
| B mm | H mm | Radius / radius mm | Art.-Nr. |
| 6 | 6 | 3 | 508-0860.060006 |
| 6 | 9 | 3 | 508-0860.060009 |
| 8 | 8 | 4 | 508-0860.080008 |
| 8 | 12 | 4 | 508-0860.080012 |
| 10 | 10 | 5 | 508-0860.100010 |
| 10 | 15 | 5 | 508-0860.100015 |
| 12 | 12 | 6 | 508-0860.120012 |
| 12 | 18 | 6 | 508-0860.120018 |
| 15 | 20 | 7,5 | 508-0860.150020 |

Silikonkautschuk FDA / silicone rubber FDA

| Form B | MVQ-860 transluzent / silicone translucent | 60 ±5° shA | -60 / +200° C |
|---------|--|---|-----------------|
| B mm | H mm | Radius / Bohrung radius / hole mm | Art.-Nr. |
| 12 | 25 | 6/6 | 508-0860.120025 |
| 13 | 22 | 6,5/8x11 | 508-0860.130022 |
| 18 | 20 | 9/7 | 508-0860.180020 |
| 20 | 25 | 10/17 | 508-0860.200025 |
| 21 | 21 | 10,5/9,5 | 508-0860.210021 |

Schaumsilikon FDA / silicone sponge FDA

| Form A | MVQ-815 weiß / white | 15 ±5° shA | -60 / +180° C |
|---------|----------------------|-----------------------|-----------------|
| B mm | H mm | Radius / radius mm | Art.-Nr. |
| 10 | 20 | 5 | 508-0815.100020 |
| 12 | 17 | 6 | 508-0815.120017 |
| 13 | 20 | 6,5 | 508-0815.130020 |
| 13 | 25 | 6,5 | 508-0815.130025 |
| 14 | 21 | 7 | 508-0815.140021 |



Moosgummi / sponge rubber

| Form A | EPDM-421 schwarz / black | 20 ±5° shA | -40 / +100° C |
|---------|--------------------------|-----------------------|-----------------|
| B mm | H mm | Radius / radius mm | Art.-Nr. |
| 10 | 20 | 5 | 508-0421.100020 |
| 12 | 17 | 6 | 508-0421.120017 |

TANKDECKEL-PROFILE / TANK-COVER SEALING PROFILES

trapezförmig / trapeziform

ROLLENLÄNGE 25-50 m und Abschnitte
ZULASSUNGEN FDA 21CFR 177.2600 konform
ROLL LENGTH 25-50 m and cut-off length
APPROVALS FDA 21CFR 177.2600 compliant

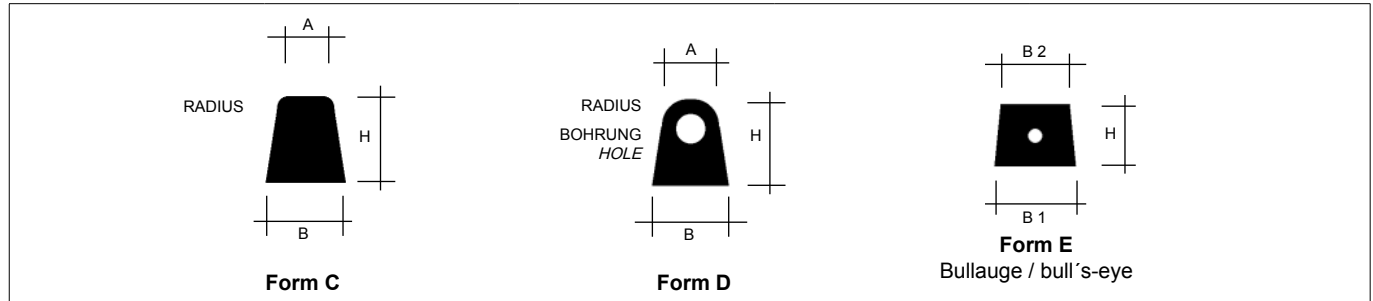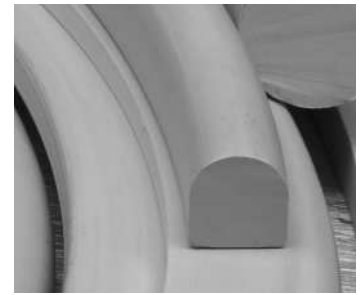

| Weichgummi FDA / soft rubber FDA | | | | |
|----------------------------------|----------------------|------|--------------------|-----------------|
| Form C | NBR-266 weiß / white | | 60 ±5° shA | -35 / +100° C |
| A mm | B mm | H mm | Radius / radius mm | Art.-Nr. |
| 4 | 8 | 7 | | 528-0266.040008 |
| 10 | 16 | 11 | | 528-0266.100016 |
| 10 | 20 | 15 | | 528-0266.100020 |
| 13 | 16 | 11 | | 528-0266.130016 |
| 20 | 25 | 8 | | 528-0266.200025 |

| Weichgummi FDA / soft rubber FDA | | | | |
|----------------------------------|----------------------|------|-----------------------------------|-----------------|
| Form D | NBR-266 weiß / white | | 60 ±5° shA | -35 / +100° C |
| A mm | B mm | H mm | Radius / Bohrung radius / hole mm | Art.-Nr. |
| 6 | 10 | 13 | 3 | 528-0266.060010 |

| Weichgummi FDA / soft rubber FDA | | | | |
|----------------------------------|------------------------|------|--------------------|-----------------|
| Form C | CR-350 schwarz / black | | 50 ±5° shA | -30 / +100° C |
| A mm | B mm | H mm | Radius / radius mm | Art.-Nr. |
| 12 | 10 | 9 | | 528-0350.100012 |

| Silikonkautschuk FDA / silicone rubber FDA | | | | |
|--|--|------|--------------------|-----------------|
| Form C | MVQ-860 transluzent / silicone translucent | | 60 ±5° shA | -60 / +200° C |
| A mm | B mm | H mm | Radius / radius mm | Art.-Nr. |
| 4 | 8 | 7 | | 528-0860.040008 |
| 10 | 16 | 11 | | 528-0860.100016 |
| 10 | 20 | 15 | | 528-0860.100020 |
| 13 | 16 | 11 | | 528-0860.130016 |
| 20 | 25 | 8 | | 528-0860.200025 |

| Silikonkautschuk FDA / silicone rubber FDA | | | | |
|--|--|------|-----------------------------------|-----------------|
| Form D | MVQ-860 transluzent / silicone translucent | | 60 ±5° shA | -60 / +200° C |
| A mm | B mm | H mm | Radius / Bohrung radius / hole mm | Art.-Nr. |
| 6 | 10 | 13 | 3 | 528-0860.060010 |

| Weichgummi / soft rubber | | | | |
|--------------------------|------------------------|------|-----------------------------------|----------------|
| Form E | CR-355 schwarz / black | | | -30 / +100° C |
| B1 mm | B2 mm | H mm | Radius / Bohrung radius / hole mm | Art.-Nr. |
| 12 | 10 | 9 | 3 | 534-0355.01210 |