
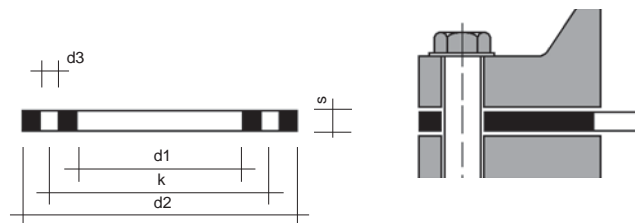


FLACHDICHTUNGEN / GASKETS

EN 12560-1 Form FF / ASME B 16.21 Form FF

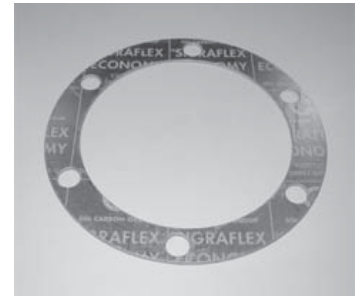

EN 12560-1 Form FF / ASME B 16.21 Form FF

Art.-Nr.	261-4400. ...		Klinger SIL C4400							
	261-0025. ...		Sigraflex C2I pro							
	261-0812. ...		Novaform SK							
	261-0265. ...		NBR-265/1E							
	261-0280. ...		NBR-280/0E							
	261-0463. ...		EPDM-463/KTW							
	261-1990. ...		PTFE							
	261-xxxx. ...		Material nach Kundenwunsch → Halbzeuge / <i>material custom-made</i> → <i>semifinished products</i>							
PN			class 150				class 300			
NPS	(DN)	d1 mm	d2 mm	k mm	d3 ... / ø	Art.- End-Nr.	d2 mm	k mm	d3 ... / ø	Art.- End-Nr.
1/2"	15	22	89	60	4/16	015150	95	67	4/16	015300
3/4"	20	27	99	70	4/16	020150	117	83	4/19	020300
1"	25	34	108	79	4/16	025150	124	89	4/19	025300
1-1/4"	32	43	117	89	4/16	032150	133	99	4/19	032300
1-1/2"	40	49	127	99	4/16	040150	155	114	4/22	040300
2"	50	61	152	121	4/19	050150	165	127	8/19	050300
2-1/2"	65	73	178	140	4/19	065150	191	149	8/22	065300
3"	80	89	191	152	4/19	080150	210	168	8/22	080300
3-1/2"	90	102	216	178	8/19	090150	229	184	8/22	090300
4"	100	115	229	191	8/19	100150	254	200	8/22	100300
5"	125	141	254	216	8/22	125150	279	235	8/22	125300
6"	150	169	279	241	8/22	150150	318	270	12/22	150300
8"	200	220	343	298	8/22	200150	381	330	12/25	200300
10"	250	273	406	362	12/25	250150	445	387	16/28	250300
12"	300	324	483	432	12/25	300150	521	451	16/32	300300
14"	350	356	533	476	12/28	350150				
16"	400	407	597	540	16/28	400150				
18"	450	458	635	578	16/32	450150				
20"	500	508	699	635	20/32	500150				
24"	600	610	813	749	20/35	600150				
Flansch / <i>flange</i>			ASME B 16.5							
Maße gerundet durch Umrechnung von Zoll auf Millimeter / <i>measures rounded down by conversion inch to millimeter</i>										